

Conoce más de nuestros
productos y servicios:



WWW.SMARTCOPANAMA.COM



Suministro de Insumos Gráficos

Para toda América Latina

Como empresa líder del sector ofrecemos soluciones integrales en el mundo de la impresión digital de Pequeño y Gran Formato.

SmartCo Panama, Inc, bajo la marca SUPRA ofrece productos autoadhesivos de alto rendimiento, estables y con excelente desempeño que generan importantes beneficios dentro de la actividad comercial. Basada en el servicio, las buenas prácticas y desempeño de los materiales SUPRA nuestra empresa potencia sólidas alianzas con distribuidores y representantes toda la región.

Empresas y emprendedores inmersos en la impresión digital convergen al considerar los productos SUPRA como materiales de alto rendimiento.



***¡Los mejores
materiales de
la industria!***

Grey Adhesive Vinyl

PRINTING METHOD

SOLVENT INK
ECO-SOLVENT INK
UV

APPLICATIONS

COMMERCIAL ADVERTISING BOARD.
VEHICLE WRAPPING MEDIA.
BILLBOARDS.
LOGO SIGNS.
PROMOTIONAL PURPOSE.
EXHIBITION.



FEATURES

EXCELLENT PRINTABILITY AND HANDLING & SUPERIOR APPEARANCE.
GOOD DIMENSIONAL STABILITY AFTER APPLICATION.
EASY APPLICATION TO A WIDE VARIETY OF SUBSTRATES.

DESCRIPTION

ADHESIVE: GREY PERMANENT ADHESIVE.
FILM: 100-MICRON GLOSSY PVC FILM.
LINER: 140 GSM WHITE PEK PAPER WITH ONE SIDE PE & SILICON COATING.
WITH: 1.06/1.27/1.37/1.52M.
LENGTH: 50 M.
WEIGHT: 17.7 KG



Clear Adhesive Vinyl

APPLICATIONS

VEHICLE WRAPPING MEDIA.
BILLBOARDS.
OUTDOORS ADVERTISING.
INDOOR ADVERTISING.
PROMOTIONAL PURPOSE.
EXHIBITION.



DESCRIPTION

ADHESIVE: GREY PERMANENT ADHESIVE.
FILM: 100-MICRON GLOSSY PVC FILM.
LINER: 140 GSM WHITE PEK PAPER WITH ONE SIDE PE & SILICON COATING.
WITH: 1.06/1.27/1.37/1.52M.
LENGTH: 50 M.
WEIGHT: 17.7 KG

FEATURES

EXCELLENT PRINTABILITY AND HANDLING .
GOOD DIMENSIONAL STABILITY AFTER APPLICATION.
EASY APPLICATION TO A WIDE VARIETY OF SUBSTRATES.

PRINTING METHOD

SOLVENT INK
ECO-SOLVENT INK
UV



Laminated Backlit Banner



DESCRIPTION

LAMINATED BACKLIT BANNER.
BASE FABRIC: 300*500D.
NORMAL INDUSTRIAL YARN.
WITH: 1.02/3.2M.
LENGTH: 50 M.
WEIGHT: 70.0 KG.

APPLICATIONS

VEHICLE WRAPPING MEDIA.
LIGHT BOX ADVERTISING.
COMMERCIAL SIGNAGE.
ELECTION.
ARTS & SPORT ACTIVITIES.
EXHIBITION PRESENTING.




FEATURES

USED FOR BACKLIT LIGHT BOX
NORMAL INDUSTRIAL YARN

SUITABLE FOR LARGE FORMAT
OUTDOOR ADVERTISING,
EXCELLENT SUPPLENESS

EASY FOR CUTTING, SPLICING AND
TRANSPORTATION.

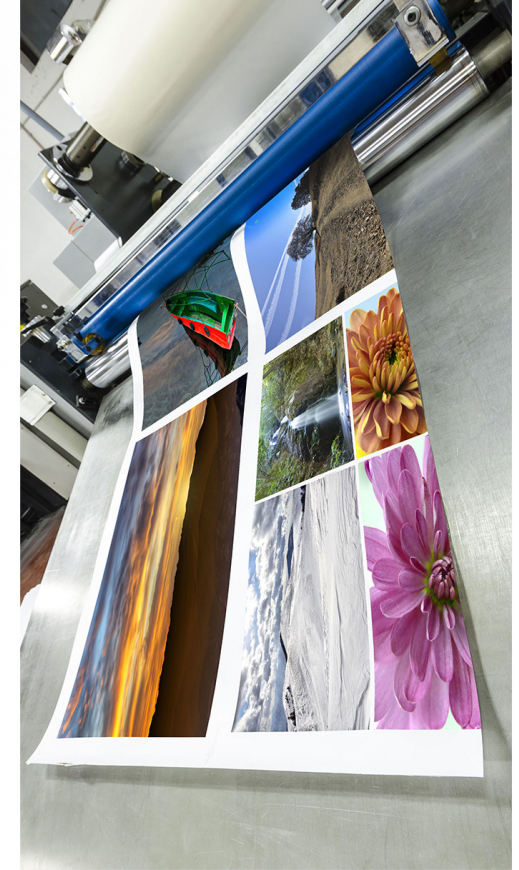

PRINTING METHOD

SOLVENT INK
ECO-SOLVENT INK
UV



Black Adhesive Viny

PRINTING METHOD

SOLVENT INK
ECO-SOLVENT INK
UV



DESCRIPTION

ADHESIVE: BLACK PERMANENT ADHESIVE.
FILM: 80-MICRON GLOSSY PVC FILM.
LINER: 100 GSM WHITE PEK PAPER WITH ONE SIDE PE & SILICON COATING.
WITH: 0.914/1.06/1.27/1.37/1.52M.
LENGTH: 50 M.
WEIGHT: 17.7 KG




APPLICATIONS

VEHICLE WRAPPING MEDIA.
BILLBOARDS.
LOGO SIGNS.
PROMOTIONAL PURPOSE.
EXHIBITION.

FEATURES

EXCELLENT PRINTABILITY AND HANDLING
GOOD DIMENSIONAL STABILITY AFTER APPLICATION
EASY APPLICATION TO A WIDE VARIETY OF SUBSTRATES.



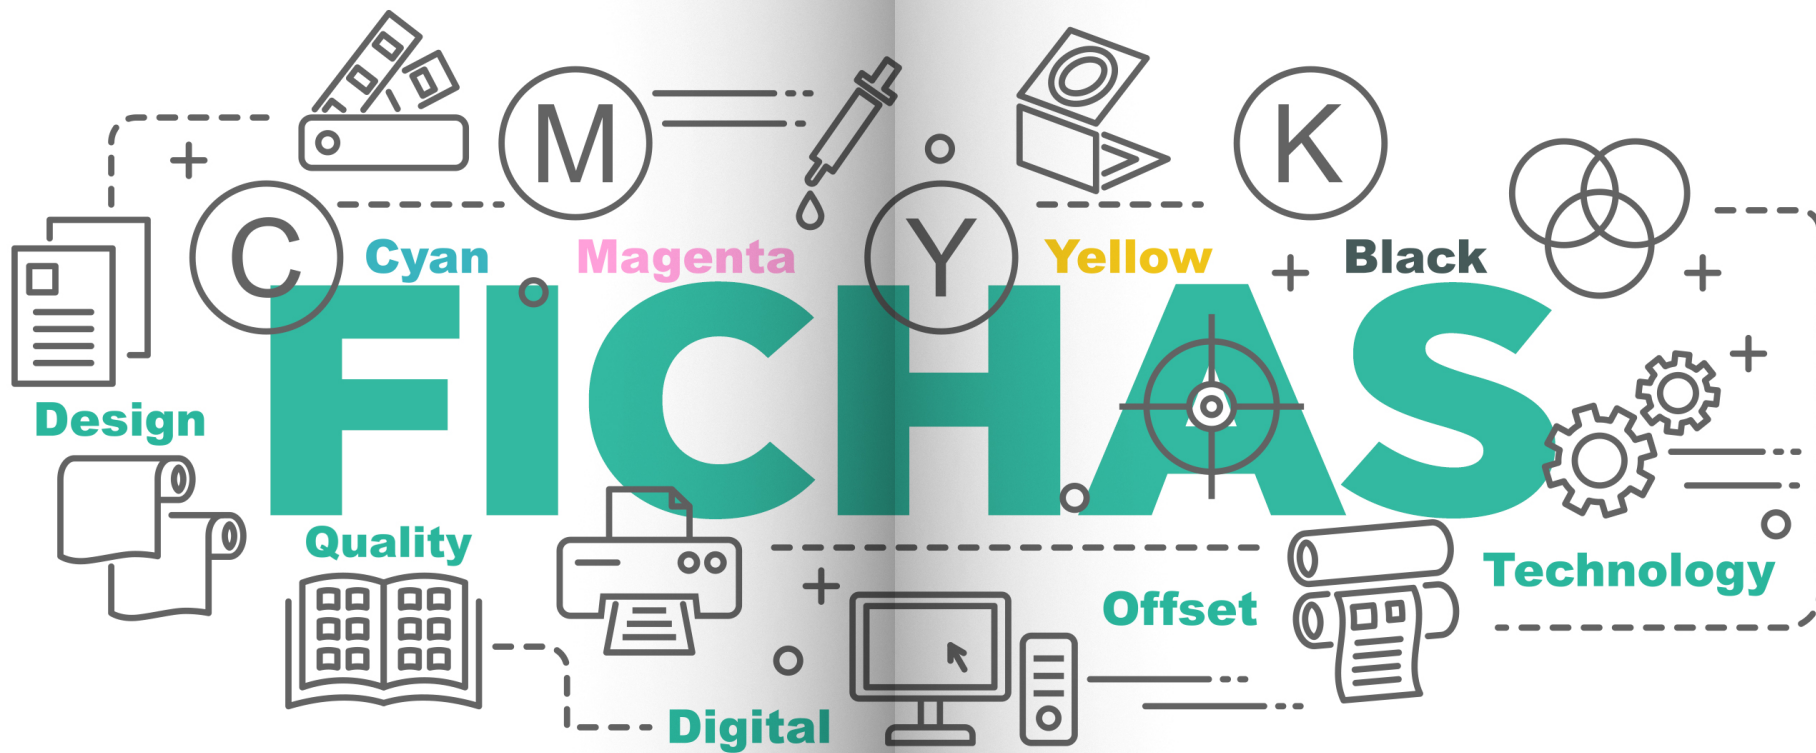

Black Adhesive Vinyl		APPLICATIONS		DESCRIPTION	
SKU # S1502V		Vehicle wrapping media. Billboards. Logo Signs. Promotional purpose. Exhibition.		Adhesive: Black permanent adhesive. Film: 80-micron glossy PVC film. Liner: 100 gsm white PEK paper with one side PE & Silicon coating. With: 0.914/1.06/1.27/1.37/1.52m. Length: 50 m. Weight: 17.7 Kg.	
FEATURES		PRINTING METHOD		TECHNICAL DATA	
1	Excellent printability and handling	Solvent ink		<p>Storage: All Supra products always need to be storage in the original packing, no more than 6 layers if store horizontally. Do not expose in direct sunlight or heat sources Shelf life will be one year with temperature of 25°C, +/-5°C and relative humidity of 50% +/-15%.</p> <p>Production and Application Environment: production environment temperature of 25°C, +/-5°C, relative humidity of 50% +/-10%, clean dust-free environment without suspended matter, please move the materials to the printing environment 24 hours before printing, printing test before use and remain enough edge margins when printing.</p> <p>Warranty Condition: Six (6) months shelf life, stored in suitable conditions, preferably use within six months. Quality range is only for ink absorption, other physical parameters is only for reference. Six-month prosecution period, from the product manufacture date no-acceptance for overdue product.</p> <p>The information mentioned in this product data sheet is based upon test that were executed by original manufacturer and that we consider to be reliable. Environment humidity than 70% in different district will decrease the printing result. This SAV product is with permanent glue and have the possibility of residual gum with different substrate and pasting period. Advise to use the same batch product joint. All technical data is subject to chance without prior notice.</p>	
2	Good dimensional stability after application	Eco-solvent ink			
3	Easy application to a wide variety of substrates.	UV			
TECHNICAL INFORMATION	UNITS	Test Method	Average Value		
Thickness PVC	Micron	GB/T6672-2001	80+/-10		
Weight liner	g/m2	GB4669-1995	100+/-10		
Weight finished product	g/m2	GB4669-1995	250+/-20		
Gloss rate 60°	%	GB8807-88	≥50		
Initial Adhesive	N/25mm	FTM 9	≥5		
24h, 180° peel	N/25mm	FTM 1	≥8		
Dimensional stability MD	mm	FTM 14	≤1.8		
Dimensional Stability CD	mm	FTM 14	≤1.5		
Tensile strength MD	N/25mm	GB/T1040.1-2006	≥35		
Tensile strength CD	N/25mm	GB/T1040.1-2006	≥25		
Construction temperature	°C		20+/-10°C		
Applicable temperature	°C		-20→+70		

Grey Adhesive Vinyl		APPLICATIONS		DESCRIPTION	
SKU # S0025V		Vehicle wrapping media. Billboards. Commercial advertising board. Logo Signs. Promotional purpose. Exhibition.		Adhesive: Grey permanent adhesive. Film: 100-micron Glossy PVC film. Liner: 140 gsm white PEK paper with one side PE & Silicon coating. With: 1.06/1.27/1.37/1.52m. Length: 50 m. Weight: 17.7 Kg.	
FEATURES		PRINTING METHOD		TECHNICAL DATA	
1	Excellent printability and handling & Superior appearance.	Solvent ink		<p>Storage: All Supra products always need to be storage in the original packing, no more than 6 layers if store horizontally. Do not expose in direct sunlight or heat sources Shelf life will be six months with temperature of 25°C, +/-5°C and relative humidity of 50% +/-15%.</p> <p>Production and Application Environment: production environment temperature of 25°C, +/-5°C, relative humidity of 50% +/-10%, clean dust-free environment without suspended matter, please move the materials to the printing environment 24 hours before printing, printing test before use and remain enough edge margins when printing.</p> <p>Warranty Condition: One (1) year shelf life, stored in suitable conditions, preferably use within six months. Quality range is only for ink absorption, other physical parameters is only for reference. One-year prosecution period, from the product manufacture date no-acceptance for overdue product.</p> <p>The information mentioned in this product data sheet is based upon test that were executed by original manufacturer and that we consider to be reliable. Environment humidity than 70% in different district will decrease the printing result. This SAV product is with permanent glue and have the possibility of residual gum with different substrate and pasting period. Advise to use the same batch product joint. All technical data is subject to chance without prior notice.</p>	
2	Good dimensional stability after application.	Eco-solvent ink			
3	Easy application to a wide variety of substrates.	UV			
TECHNICAL INFORMATION	UNITS	Test Method	Average Value		
Thickness PVC	Micron	GB/T6672-2001	80+/-10		
Weight liner	g/m2	GB4669-1995	140+/-10		
Weight finished product	g/m2	GB4669-1995	305+/-20		
Gloss rate 60°	%	GB8807-88	≥60		
Initial Adhesive	N/25mm	FTM 9	≥5		
24h, 180° peel	N/25mm	FTM 1	≥9		
Dimensional stability MD	mm	FTM 14	≤1.5		
Dimensional Stability CD	mm	FTM 14	≤1.0		
Tensile strength MD	N/25mm	GB/T1040.1-2006	≥45		
Tensile strength CD	N/25mm	GB/T1040.1-2006	≥35		
Construction temperature	°C		20+/-10°C		
Applicable temperature	°C		-20→+70		

Clear Adhesive Vinyl		APPLICATIONS		DESCRIPTION	
SKU # S1502V		Vehicle wrapping media. Billboards. Outdoors advertising. Indoor Advertising. Promotional purpose. Exhibition.		Adhesive: Clear permanent adhesive. Film: 80-micron matte PVC film. Liner: 120 gsm white PEK paper with one side PE & Silicon coating. With: 0.914/1.06/1.27/1.37/1.52m. Length: 50 m. Weight: 17.7 Kg.	
FEATURES		PRINTING METHOD		TECHNICAL DATA	
1	Excellent printability and handling	Solvent ink		<p>Storage: All Supra products always need to be storage in the original packing, no more than 6 layers if store horizontally. Do not expose in direct sunlight or heat sources Shelf life will be six months with temperature of 25°C, +/-5°C and relative humidity of 50% +/-15%.</p> <p>Production and Application Environment: production environment temperature of 25°C, +/-5°C, relative humidity of 50% +/-10%, clean dust-free environment without suspended matter, please move the materials to the printing environment 24 hours before printing, printing test before use and remain enough edge margins when printing.</p> <p>Warranty Condition: Six (6) months shelf life, stored in suitable conditions, preferably use within six months. Quality range is only for ink absorption, other physical parameters is only for reference. Six-month prosecution period, from the product manufacture date no-acceptance for overdue product.</p> <p>The information mentioned in this product data sheet is based upon test that were executed by original manufacturer and that we consider to be reliable. Environment humidity than 70% in different district will decrease the printing result. This SAV product is with permanent glue and have the possibility of residual gum with different substrate and pasting period. Advise to use the same batch product joint. All technical data is subject to chance without prior notice.</p>	
2	Good dimensional stability after application	Eco-solvent ink			
3	Easy application to a wide variety of substrates.	UV			
TECHNICAL INFORMATION	UNITS	Test Method	Average Value		
Thickness PVC	Micron	GB/T6672-2001	80+/-10		
Weight liner	g/m2	GB4669-1995	120+/-10		
Weight finished product	g/m2	GB4669-1995	250+/-20		
Gloss rate 60°	%	GB8807-88	≥50		
Initial Adhesive	N/25mm	FTM 9	≥5		
24h, 180° peel	N/25mm	FTM 1	≥8		
Dimensional stability MD	mm	FTM 14	≤1.8		
Dimensional Stability CD	mm	FTM 14	≤1.5		
Tensile strength MD	N/25mm	GB/T1040.1-2006	≥35		
Tensile strength CD	N/25mm	GB/T1040.1-2006	≥25		
Construction temperature	°C		20+/-10°C		
Applicable temperature	°C		-20→+70		

Laminated Backlit Banner		APPLICATIONS		DESCRIPTION	
SKU # S4413B		Vehicle wrapping media. Light Box advertising. Commercial Signage. Election. Arts & Sport activities. Exhibition presenting.		Laminated Backlit Banner. Base fabric: 300*500D. Normal industrial yarn. With: 1.02/3.2m. Length: 50 m. Weight: 70.0 Kg.	
FEATURES		PRINTING METHOD		TECHNICAL DATA	
1	Used for backlit Light box normal industrial yarn	Solvent ink		<p>Storage: All Supra products always need to be storage in the original packing, no more than 6 layers if store horizontally. Do not expose in direct sunlight or heat sources Shelf life will be six months with temperature of 25°C, +/-5°C and relative humidity of 50% +/-15%.</p> <p>Production and Application Environment: production environment temperature of 25°C, +/-5°C, relative humidity of 50% +/-10%, clean dust-free environment without suspended matter, please move the materials to the printing environment 24 hours before printing. Printing ink temperature of 18°C to 28°C. Equipment preheating temperature of 30°C. Application environment, temperature of 18°C to 28°C, relative humidity of 50+/-15%</p> <p>Warranty Condition: One (1) year service life, stored in suitable conditions, preferably use within six months. One-year prosecution period, from the product manufacture date no-acceptance for overdue product.</p> <p>The information mentioned in this product data sheet is based upon test that were executed by original manufacturer and that we consider to be reliable. Advise to use the same batch product joint. Please evaluate on the project environment in advance to confirm the products suitability. All technical data is subject to chance without prior notice.</p>	
2	Suitable for large format outdoor advertising, excellent suppleness	Eco-solvent ink			
3	Easy for cutting, splicing and transportation.	UV			
TECHNICAL INFORMATION	UNITS	Test Method	Average Value		
Basic fabric yarn	Denier	GB/T16604	300D*500D		
Basic fabric density	Thread/inch	FZ/T01003	18x12		
Finished fabric Weight	gram/m2	GB/T4669	440+/-20		
Tensile strength at MD	N/5cm	GT/T1040	≥300		
Tensile strength at CD	N/5cm	GT/T1040	≥250		
Tearing strength at MD	N/5cm	GT/T16578	≥50		
Tearing strength at CD	N/5cm	GT/T16578	≤40		
Temperature range	°C		-20→+70		
Flame retardancy					

¿Tienes alguna pregunta?

¿Tiene alguna pregunta sobre nuestros productos?

¿Le interesaría saber más información o precios?

Por favor escribanos su solicitud a través de nuestros enlaces y le contactaremos lo antes posible.



+50768095151
+584142611961



Contactos:

Supra - LATAM
cr@smartcopanama.com
Tlf +50768095151
San Francisco – Ciudad de Panamá.



Supra – VENEZUELA
todoimpresiones1@gmail.com
Tlf +584142611961
Maiquetía – Vargas.